




Beam of Light Technologies, Inc.
 Portland, Oregon, USA
 503-867-1617 603-386-6644 Fax
 John@Z-Bolt.com
 Z-Bolt is registered trademark of Beam of Light Technologies, Inc. All Rights Reserved

Diode Assembly Specifications

GENERAL:

Z-Bolt 8 mm Green Laser Dot Module

Part Number	DPSS-5M-SP
Color	Green
Units per Sale Package	5 pieces
Output Type [Dot / Line]	Dot

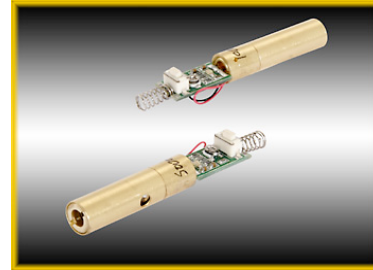

LASER DIODE:

Wavelength	532nm
Output Power	Z-Bolt Certified 4.0 ~ 5.0mW
FDA Class / ANSI Class	Class IIIa / 3R
Factory Power Report	Included
MTTF	>5000hr
Beam Mode	TEM ₀₀
Beam Diameter at Aperture	1.5 mm
Beam Divergence	<1.2 mrad
Beam Alignment	N/A
IR Filter	Yes

LASER PACKAGE:

Housing / Case Material	Brass
Circuit Board Exposure	No
Circuit Type	APC
Switch Type	None
Operation Mode	CW Mode

POWER:

Input Voltage	3V DC
Electrical Connections	Power Spring
Circuit Polarity	Case Positive
Operating Current	<300mA

DIMENSIONS & WEIGHT:

Length Overall (excluding leads / spring)	46.5mm +/-1mm
Outside Diameter	8mm +/-1mm
Diode Case Length	30.5mm +/-1mm (without pcb)
Weight Overall	

ENVIRONMENT

Operating Temperature	15C° ~ 35C°
Warm Up Time	< 3 sec

DIAGRAM

